

Control of focusing forces and emittances in plasma-based accelerators using near-hollow plasma channels

C. B. Schroeder, E. Esarey, C. Benedetti, and W. P. Leemans

Lawrence Berkeley National Laboratory, Berkeley, California 94720 USA

(Dated: 30 April 2013)

A near-hollow plasma channel, where the plasma density in the channel is much less than the plasma density in the walls, is proposed to provide independent control over the focusing and accelerating forces in a plasma accelerator. In this geometry the low density in the channel contributes to the focusing forces, while the accelerating fields are determined by the high density in the channel walls. The channel also provides guiding for intense laser pulses used for wakefield excitation. In certain regimes, both electron and positron beams can be accelerated and focused in a nearly symmetric fashion. Near-hollow plasma channels can effectively mitigate emittance growth due to Coulomb scattering for high-energy physics applications.

I. INTRODUCTION

Plasma-based accelerators are of interest because of their ability to sustain large acceleration gradients, enabling compact accelerating structures. The electric field of the electron plasma wave is on the order of $E_0 = cm_e\omega_p/e$, or $E_0[\text{V/m}] \simeq 96\sqrt{n_0[\text{cm}^{-3}]}$, where $\omega_p = k_p c = (4\pi n_0 e^2/m_e)^{1/2}$ is the electron plasma frequency, n_0 is the ambient electron number density, m_e and e are the electron rest mass and charge, respectively, and c is the speed of light in vacuum. This field can be several orders of magnitude greater than conventional accelerators, which are limited by material breakdown. Electron plasma waves with relativistic phase velocities may be excited by the ponderomotive force of an intense laser¹ or the space-charge force of a charged particle beam.^{2,3} High-quality 1 GeV electron beams have been produced using using 40 TW laser pulses in cm-scale plasmas.⁴ Beam-driven plasma waves have also been used to double the energy of a fraction of electrons on the beam tail by the plasma wave excited by the beam head.⁵ These experimental successes have resulted in further interest in the development of plasma-based acceleration as a basis for future linear colliders.⁶⁻⁸

The focusing forces acting on beams originate from the transverse wakefields in the plasma. For beam or laser drivers in the blow-out regime $n_b/n_0 \gg 1$ the focusing forces are determined by the background ion density. For laser-driven plasma waves in the quasi-linear regime, the focusing forces can be controlled by controlling the transverse wakefields using shaped transverse laser intensity profiles.⁹ Matching the beam to the focusing force is required to prevent emittance growth, and independent control of the transverse focusing and longitudinal accelerating forces and, hence, the beam radius, is desired for control of emittance.¹⁰

For high-energy physics applications, beams require ultra-low emittance to achieve the required luminosity. For fixed beam size, matching the beam in a plasma accelerator requires adjusting the focusing force of the wakefield as the beam accelerates such that $k_\beta = \epsilon_n/(\gamma\sigma_x^2)$, where k_β is the betatron wavenumber of the fo-

cusing force, ϵ_n is the normalized transverse emittance, σ_x the beam transverse size, and γ is the beam energy Lorentz factor. For beam density greater than the plasma density $n_b \gg n_0$, the beam will blowout the surrounding electrons such that $k_\beta = k_p/\sqrt{2\gamma}$, and for sufficiently high beam density in a uniform plasma $n_b/n_0 \gg M_i/m_e$, where M_i is the ion mass, the background plasma ions will move on the plasma period time-scale, leading to emittance growth.¹¹ Maintaining $n_b \lesssim n_0$ typically requires weak focusing $k_\beta = \epsilon_n/(\gamma\sigma_x^2) \ll k_p/\sqrt{\gamma}$. This weak focusing can lead to emittance growth via Coulomb scattering with background ions in the plasma.

Hollow plasma channels, with zero density out to the channel radius and constant density for larger radii, have been studied^{12,13} due to the beneficial properties of the accelerating structure. In a hollow channel, the transverse profile of the driver is largely decoupled from the transverse profile of the accelerating mode. Therefore, for a relativistic driver, the accelerating gradient is uniform and the focusing fields are linear. In addition, the accelerating mode of the hollow channel is primarily electromagnetic, unlike the electrostatic fields excited in a homogeneous plasma.

In this work, we propose to use a partially-filled (near-hollow) plasma channel, with plasma density in the channel much less than the plasma density in the channel wall, to provide independent control of the focusing forces. In this geometry, the plasma density in the channel contributes to the focusing force, and the accelerating force is determined by the plasma density in the channel walls. For a sufficiently relativistic driver, the focusing wakefield is transversely linear and axially uniform. Hence any projected transverse emittance growth due to beam head-to-tail mismatch is eliminated. It is also shown that the accelerating and focusing forces in this geometry can mitigate emittance growth via Coulomb collisions with background ions, preserving ultra-low emittance for high-energy physics applications. Ion motion in the channel is also negligible for resonant beams. A near-hollow channel, as described below, allows matched beam propagation with a constant beam density without significant emittance growth via scattering. In certain regimes, both electrons and positrons beams can be accelerated and fo-

cused in a nearly symmetrical fashion.

II. WAKEFIELDS IN NEAR-HOLLOW CHANNELS

Consider a plasma channel with an initial plasma density of the form $n(r) = n_c$ for $r < r_c$ and $n(r) = n_w$ for $r \geq r_c$, where n_w is the electron plasma density in the wall, n_c is the electron plasma density in the channel ($n_c \ll n_w$), and r_c is the channel radius. We will consider $k_w r_c \sim 1$ where $k_w^2 = 4\pi n_w e^2 / m_e c^2$ is the plasma wavenumber corresponding to the wall density. To provide weak focusing of an electron beam we will consider $k_c^2 \ll k_w^2$, where $k_c^2 = 4\pi n_c e^2 / m_e c^2$ is the plasma wavenumber corresponding to the channel density.

Excitation of large amplitude plasma waves requires high-intensity lasers, $a_0 \sim 1$, where $a_0^2 \simeq 7.32 \times 10^{-19} \lambda_0^2 [\mu\text{m}] I_0 [\text{W}/\text{cm}^2]$ with λ_0 the laser wavelength and I_0 the peak laser intensity. Note that such a plasma channel can effectively guide a laser pulse,¹² as the channel depth (not the on-axis density) provides for laser guiding.¹ The laser spot size w_0 for quasi-matched propagation can be computed following Ref. 14, and $w_0 \sim r_c$ is typically required for guiding. In this regime $a_0^2 / (1 + a_0^2/2)^{1/2} > k_c^2 w_0^2 / 2$, and the transverse ponderomotive force of the laser will expel the channel electrons, leaving an ion channel.¹ This ion channel can provide linear, phase-independent focusing for an ultra-relativistic witness bunch. In the following we will consider wakefields excited by a laser driver, although a particle beam driver can also excite wakefields with similar properties in a near-hollow channel.

The wake excited in such a channel will consist of an electromagnetic wake owing to surface currents driven in the channel walls and a wake owing to the background ions in the channel. In the limit $k_c^2 \ll k_w^2$, the accelerating field in the channel is dominated by the currents in the wall and has the form¹²

$$E_z \simeq -E_w \Omega \int_{-\infty}^{\zeta} k d\zeta' \cos[k(\zeta - \zeta')] a^2(r = r_c, \zeta') / 4, \quad (1)$$

where $a(r, \zeta) = eA/mc^2$ is the normalized transverse vector potential profile of the laser, $\zeta = z - \beta_p t$, $c\beta_p$ is the driver velocity and $\gamma_p = (1 - \beta_p^2)^{-1/2} \gg 1$. For a laser driver, $\gamma_p \sim k_0/k_w = 2\pi/(k_w \lambda_0)$. The excited mode wavenumber is^{12,13}

$$k = k_w \left[1 + \frac{k_w r_c K_0(k_w r_c)}{2K_1(k_w r_c)} \right]^{-1/2} \equiv k_w \Omega, \quad (2)$$

and, for typical parameters, $\Omega \sim 1$. The focusing field excited in the channel is given by

$$E_r - \beta B_\theta \simeq E_c \frac{k_c r}{2} + E_w \frac{k_w r}{4} (\gamma^{-2} - \gamma_p^{-2}) \times \Omega^2 \int_{-\infty}^{\zeta} k d\zeta' \sin[k(\zeta - \zeta')] a^2(r = r_c, \zeta') / 4, \quad (3)$$

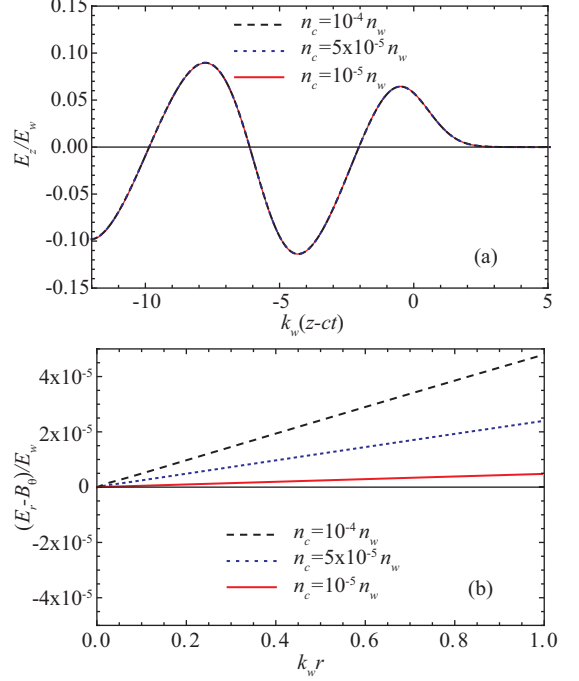


FIG. 1. Plasma wakefield excited by a quasi-matched, resonant Gaussian laser pulse with $a_0 = 1$ and $k_w w_0 = 2.3$ in a near-hollow channel with $k_w r_c = 1.5$ and $n_c/n_w = 10^{-5}$, 5×10^{-5} and 10^{-4} . (a) On axis accelerating wakefield E_z/E_w versus $k_w(z - ct)$. (b) Focusing wakefield $(E_r - B_\theta)/E_w$ in the channel (at the peak E_z) versus $k_w r$.

where $\gamma^2 = 1/(1 - \beta^2) \gg 1$ and $c\beta$ witness beam velocity. Here $E_w = m_e c^2 k_w / e$ and $E_c = m_e c^2 k_c / e$. The first term on the right-hand side of Eq. (3) is due to the ion cavity in the channel and the second term is due to the currents driven in the channel walls. The focusing force is linear to order $\mathcal{O}(\gamma_p^{-2})$ with respect to the radial position $E_z - \beta B_\theta \propto r$ and hence the rms normalized transverse (slice) emittance is conserved to that order. In the regime $n_c/n_w > a_0^2(r_c)/(8\gamma_p^2)$ and $\gamma^2 \gg \gamma_p^2$, the focusing from the channel ion density dominates $E_z - \beta B_\theta \simeq E_c k_c r / 2$ and $k_\beta = k_c / \sqrt{2\gamma}$. In this case the focusing force is uniform (in phase) over the entire bunch, eliminating any betatron mismatch between the head and tail of the beam.¹⁵ Matched propagation is achieved for $n_c/n_w = 2(k_w \epsilon_n)^2 / [\gamma(k_w \sigma_x)^4]$. For the case of an effectively hollow channel, the focusing forces can be controlled by proper phasing of a short witness beam in the wakefield. Acceleration of positron beams would operate in this regime.

Figure 1 shows the normalized longitudinal E_z/E_w and transverse $(E_r - B_\theta)/E_w$ wakefields excited by a quasi-matched,¹⁴ resonant Gaussian laser with $a_0 = 1$, $k_0/k_w = 100$, and $k_w w_0 = 2.3$, in a channel with $k_w r_c = 1.5$ and $n_c/n_w = 10^{-5}$, 5×10^{-5} and 10^{-4} . The wakefields shown in Fig. 1 were computed using the particle-in-cell code **INF&RNO**.¹⁶ Figure 1(a) shows the ac-

celerating field is determined by the wall density and independent of the channel density for $n_c \ll n_w$. In addition, the accelerating field is uniform with respect to radial position inside the channel. Figure 1(b) shows independent control over the focusing field on a witness bunch (for fixed accelerating field) by varying the channel density. These transverse wakefields have excellent properties for beam emittance preservation, namely linear $\propto r$ and axially constant throughout a witness beam.

III. EMITTANCE GROWTH BY SCATTERING

It is well-known that emittance growth can occur by elastic scattering with the plasma ions.^{7,17,18} Coulomb collisions results in a change of the rms divergence of the beam particle.¹⁹ For the case of a near-hollow channel,

$$\begin{aligned} \frac{d\langle\Delta\theta_x^2\rangle}{dz} &= \frac{4\pi r_e^2}{\gamma^2} \int_{r_{\min}}^{r_{\max}} \frac{dr}{r} Z^2 n_i \\ &= \frac{r_e}{\gamma^2} [Z_c k_c^2 \ln(r_c/r_{\min}) + Z_w k_w^2 \ln(1 + \lambda_D/r_c)], \end{aligned} \quad (4)$$

where $\Delta\theta_x = \Delta p_x/p_z$ is the ratio of transverse to longitudinal particle momentum, Z is the charge state of the ions (i.e., $n_i = n_e/Z$ the ion number density), and the brackets indicate an rms average over many scattering events. In the quasi-linear wakefield regime, background electrons are present and provide screening in the channel walls, such that the maximum impact parameter is $r_{\max} \sim r_c + \lambda_D$ where $\lambda_D = (k_B T / 4\pi n_w e^2)^{1/2}$ is the Debye length. For typical laser-ionized plasmas, the electron plasma temperature $k_B T$ is on the order of eV. For $k_w r_c \sim 1$, $\lambda_D/r_c \sim (k_B T / m_e c^2)^{1/2} = \beta_{th} \ll 1$. The minimum impact parameter is the effective nuclear radius, $r_{\min} = 1.4A^{1/3}$ fm, with A the mass number.²⁰ For typical parameters, $\ln(r_c/r_{\min}) \sim 10$ and $\ln(1 + \lambda_D/r_c) \sim \beta_{th} \ll 1$. For a relativistic particle undergoing linear focusing ($F_x/m_e c^2 = -k_\beta^2 x$) with acceleration and an approximately matched beam, the resulting rms normalized emittance $\epsilon_n = \gamma \epsilon_x$ growth is

$$\frac{d\epsilon_n}{dz} = \frac{\gamma}{2k_\beta} \frac{d\langle\theta_x^2\rangle}{dz}. \quad (5)$$

Strong focusing (large k_β) suppresses the emittance growth from scattering.

A. Constant focusing force in homogeneous plasma

To compare to the case of a near-hollow channel, we first review the case of scattering in a homogeneous plasma.^{7,17,18} Consider a constant focusing force, with $k_\beta = \kappa/\gamma^{1/2}$ and $\kappa = \text{constant}$. For the quasi-linear laser-driven wake regime, $\kappa^2 = (\phi_0/r_\perp^2) \sin\psi$, where ψ is phase location of the beam in the plasma wave, $r_\perp$ is the transverse scale length of the wakefield, and ϕ_0 is the

wakefield amplitude. The accelerating field is $d\gamma/dz = k_p E_z/E_0$. Assuming the quasi-linear laser-driven wake regime, $d\gamma/dz = k_p \phi_0 \cos\psi$. In the highly-nonlinear bubble regime,¹⁸ $\kappa = k_p/\sqrt{2}$ and $E_z/E_0 = k_p r_B/2$, where r_B is the bubble radius (approximately the nonlinear plasma wavelength).

For constant wakefield focusing, the emittance growth is

$$\frac{d\epsilon_n}{d\gamma} = \frac{k_p r_e Z}{2\kappa(E_z/E_0)\gamma^{1/2}} \ln(r_{\max}/r_{\min}), \quad (6)$$

which may be solved to yield

$$\Delta\epsilon_n = \left[\frac{k_p}{\kappa(E_z/E_0)} \right] r_e Z \ln\left(\frac{r_{\max}}{r_{\min}}\right) (\gamma_f^{1/2} - \gamma_i^{1/2}), \quad (7)$$

where γ_f and γ_i are the final and initial beam energies, respectively. Note that $r_{\max} = \lambda_D$ in the quasi-linear regime and $r_{\max} = r_B$ in the nonlinear bubble regime. For the quasi-linear regime,

$$\frac{k_p}{\kappa(E_z/E_0)} = \left[\phi_0^{3/2} \sin^{1/2}(\psi) \cos(\psi) / (k_p r_\perp) \right]^{-1}, \quad (8)$$

and in the bubble regime, $k_p/[\kappa(E_z/E_0)] = 2\sqrt{2}/(k_p r_B)$. Typically $k_p r_\perp \sim 1$ and $k_p r_B \sim 1$, such that $k_p/[\kappa(E_z/E_0)] \sim 1$ and there is a weak dependence on the plasma density. Scattering is suppressed by the strong focusing provided by the plasma wave. As the beam accelerates, the beam radius decreases and the peak beam density increases. In the quasi-linear regime, this could lead to beam-induced plasma blow-out when $n_b > n_0$, which could be partially mitigated using bunch trains.

B. Constant beam density in homogeneous plasma

If fixed beam density is desired, i.e., $\sigma_x = \text{constant}$, one may consider varying the focusing force with energy such that the beam remains matched $k_\beta = \epsilon_n/(\gamma\sigma_x^2)$ or $\kappa \propto 1/\gamma^{1/2}$. In this case, the emittance growth is

$$\frac{d\epsilon_n}{d\gamma} = \frac{\sigma_x^2 k_p r_e Z}{2\epsilon_n(E_z/E_0)} \ln\left(\frac{\lambda_D}{r_{\min}}\right), \quad (9)$$

which may be solved to yield

$$\epsilon_{nf}^2 - \epsilon_{ni}^2 = \frac{k_p r_e Z \sigma_x^2}{(E_z/E_0)} \ln\left(\frac{\lambda_D}{r_{\min}}\right) (\gamma_f - \gamma_i), \quad (10)$$

where ϵ_{nf} and ϵ_{ni} are the final and initial normalized beam emittances, respectively. With $\gamma_f \gg \gamma_i$ and $\epsilon_{nf} \gg \epsilon_{ni}$,

$$\epsilon_{nf} \simeq \left[\frac{k_p r_e Z \sigma_x^2 \gamma_f}{(E_z/E_0)} \ln\left(\frac{\lambda_D}{r_{\min}}\right) \right]^{1/2}. \quad (11)$$

This emittance growth can be prohibitively large for high-energy physics applications. Note that a similar expression was obtained in Ref. 21.

C. Constant beam density in near-hollow plasma channel

Consider the case of scattering in a near-hollow plasma channel. We assume $n_c/n_w \ll 1$, and $n_c \ln(r_c/r_{\min}) < n_w \ln(1 + \lambda_D/r_c) \approx n_w \beta_{th}/(k_w r_c)$, where the scattering is dominated by interaction of the beam with the ions in the wall of the plasma channel. In this case the scattering rate is

$$\frac{d\epsilon_n}{d\gamma} = \frac{r_e Z_w \beta_{th}}{2(E_z/E_w) r_c k_\beta \gamma}, \quad (12)$$

where E_z is given by Eq. (1). With a focusing force that maintains constant beam density, $\sigma_x^2 = \epsilon_n/(\gamma k_\beta) = \text{constant}$, the emittance growth is

$$\epsilon_{nf} = \left[\epsilon_{ni}^2 + \frac{\sigma_x^2 r_e Z_w \beta_{th}}{(E_z/E_w) r_c} (\gamma_f - \gamma_i) \right]^{1/2}. \quad (13)$$

For typical laser-plasma parameters, $E_z/E_w \sim a^2 \lesssim 1$, $k_w \sigma_x \sim 1$, $k_w r_c \sim 1$, $Z_w \sim 1$, and $\beta_{th} \sim 10^{-3}$. Hence, for $\epsilon_{nf} \gg \epsilon_{ni}$ and $\gamma_f \gg \gamma_i$, $\epsilon_{nf} \sim (\gamma_f r_e \beta_{th}/k_w)^{1/2}$. For high-energy physics applications $\gamma_f = 10^6$, and if the laser-plasma accelerator is operating at a density of $n_w = 10^{17} \text{ cm}^{-3}$, then $\epsilon_{nf} \sim 10^{-8} \text{ m}$. This emittance growth is acceptable for high-energy physics applications. By contrast, Eq. (11) implies $\epsilon_{nf} \sim 10^{-6} \text{ m}$ for similar parameters.

D. Constant focusing force in near-hollow plasma channel

For a near-hollow channel, the beam density need not be constant and a constant focusing force can be considered. In this case, the beam pinches as it accelerates, however beam-induced plasma blow-out is not an issue since the beam is propagating in an ion channel and on-axis electrons are not required to provide focusing. Furthermore, the beam induced wake (beam loading) excited in the channel walls will be largely determined by the total beam charge, and not the peak beam density. The on-axis peak density can increase until limits imposed by ion motion.

For constant focusing, the rate of scattering is

$$\frac{d\epsilon_n}{d\gamma} = \frac{r_e Z_w \beta_{th}}{2(E_z/E_w) r_c \kappa \gamma^{1/2}}, \quad (14)$$

and the emittance growth is

$$\Delta\epsilon_n = \frac{r_e Z_w \beta_{th}}{(E_z/E_w) r_c \kappa} \left(\gamma_f^{1/2} - \gamma_i^{1/2} \right). \quad (15)$$

For typical laser-plasma parameters, $E_z/E_w \sim a^2 \lesssim 1$, $k_w r_c \sim 1$, $Z_w \sim 1$, $\kappa \sim k_w/\gamma_p$, and $\beta_{th} \sim 10^{-3}$. Hence, for $\gamma_f \gg \gamma_i$, $\Delta\epsilon_n \sim \gamma_p r_e \beta_{th} \gamma_f^{1/2}$. For high-energy physics applications $\gamma_f = 10^6$, and if the laser-plasma accelerator is operating at a plasma density such that $\gamma_p = 10^2$, then $\Delta\epsilon_n \lesssim 10^{-12} \text{ m}$, which is orders of magnitude smaller than that given by Eq. (13).

IV. SUMMARY AND CONCLUSIONS

In this work, we have described a method to independently control the focusing and accelerating forces provided by a plasma accelerator by using a near-hollow ($n_c/n_w \ll 1$) plasma channel. The accelerating wakefield is determined by the wall density n_w . In the limit $n_c/n_w > a_0^2(r_c)/(8\gamma_p^2)$ the channel density n_c determines the focusing wakefield, and $k_\beta = k_c/\sqrt{2\gamma}$. This control of the focusing field allows matched propagation of a witness beam accelerated by the wakefield driven by an intense laser pulse or relativistic beam. In principle, this channel geometry can provide perfectly matched propagation of a high-energy beam, reducing emittance growth. Emittance growth via Coulomb scattering is mitigated using this transverse plasma profile, enabling high-energy physics applications. Use of a near-hollow plasma channel removes the need for low density bunches $n_b < n_0$ for control of the focusing forces, thereby allowing strong focusing to be applied (in the quasi-linear regime of laser-plasma acceleration), further reducing the emittance growth.

The near-hollow channel in the limit described above, in which the focusing is provided by the channel ions n_c , is applicable to accelerating and focusing electron beams. For positron beams, required for high-energy physics applications, one can consider operating in the limit $n_c/n_w < a_0^2(r_c)/(8\gamma_p^2)$ in which the focusing is determined by the electromagnetic mode excited in the channel wall. In this case, the focusing force is given by $\kappa^2 = [(E_z/E_w)\Omega \tan \psi] k_w^2/(4\gamma_p^2)$. In this regime, electrons and positrons can be accelerated and focused in a nearly symmetrical fashion.

In this analysis we have neglected ion motion. Ion motion in the channel due to the presence of a beam can be estimated as $\Delta r/r_0 \sim Z_c(m_e/M_i)(n_b/n_w)(k_w c \Delta t)^2$, where r_0 is the channel ion position, Δr is the displacement of the ion during interaction with the witness beam, and Δt is the interaction time between the witness beam and a background ion. For resonant beams $k_w c \Delta t \lesssim 1$. Sufficiently weak focusing should be provided such that the beam density satisfies $Z_c(m_e/M_i)(n_b/n_w) \ll 1$, and the motion of ions in the channel is negligible.

Other non-ideal effects may influence the wakefield structure. For example, finite wall thickness in the channel (i.e., a finite gradient in plasma density at the wall) will result in a slow decay of the wakefield, due to mode coupling at $k_w(r) = k$, with characteristic length scale $L_d \sim k_w/(\partial_r k_w)$,²² typically orders of magnitude larger than k_w^{-1} .

Although the example presented in Fig. 1 considered a laser driver, a beam driver will produce a similar wakefield structure in a near-hollow plasma channel with the wakefield phase velocity approximately the drive beam velocity. Use of relativistic beams would enable the focusing to be dominated by the channel ions for lower channel densities.

ACKNOWLEDGMENTS

This work was supported by the Director, Office of Science, Office of High Energy Physics, of the U.S. Department of Energy under Contract No. DE-AC02-05CH11231.

- ¹E. Esarey, C. B. Schroeder, and W. P. Leemans, *Rev. Mod. Phys.* **81**, 1229 (2009).
- ²P. Chen, J. M. Dawson, R. W. Huff, and T. Katsouleas, *Phys. Rev. Lett.* **54**, 693 (1985).
- ³J. B. Rosenzweig, *Phys. Rev. A* **38**, 3634 (1988).
- ⁴W. P. Leemans, B. Nagler, A. J. Gonsalves, C. Tóth, K. Nakamura, C. G. R. Geddes, E. Esarey, C. B. Schroeder, and S. M. Hooker, *Nature Phys.* **2**, 696 (2006).
- ⁵I. Blumenfeld, C. E. Clayton, F.-J. Decker, M. J. Hogan, C. Huang, R. Ischebeck, R. Iverson, C. Joshi, T. Katsouleas, N. Kirby, W. Lu, K. A. Marsh, W. B. Mori, P. Muggli, E. Oz, R. H. Siemann, D. Walz, and M. Zhou, *Nature* **445**, 741 (2007).
- ⁶A. Seryi, M. J. Hogan, S. Pei, T. O. Raubenheimer, P. Tenenbaum, C. Huang, C. Joshi, W. Mori, T. Katsouleas, and P. Muggli, in *Proc. PAC09* (JACoW, Vancouver, BC, 2009).
- ⁷C. B. Schroeder, E. Esarey, C. G. R. Geddes, C. Benedetti, and W. P. Leemans, *Phys. Rev. ST Accel. Beams* **13**, 101301 (2010).
- ⁸C. B. Schroeder, E. Esarey, and W. P. Leemans, *Phys. Rev. ST Accel. Beams* **15**, 051301 (2012).
- ⁹E. Cormier-Michel, E. Esarey, C. G. R. Geddes, C. B. Schroeder, K. Paul, P. J. Mullaney, J. R. Cary, and W. P. Leemans, *Phys. Rev. ST Accel. Beams* **14**, 031303 (2011).
- ¹⁰R. Assmann and K. Yokoya, *Nucl. Instrum. Methods Phys. Res. A* **410**, 544 (1998).
- ¹¹J. B. Rosenzweig, A. M. Cook, A. Scott, M. C. Thompson, and R. B. Yoder, *Phys. Rev. Lett.* **95**, 195002 (2005).
- ¹²T. C. Chiou, T. Katsouleas, C. Decker, W. B. Mori, G. Shvets, and J. S. Wurtele, *Phys. Plasmas* **2**, 310 (1995).
- ¹³C. B. Schroeder, J. S. Wurtele, and D. H. Whittum, *Phys. Rev. Lett.* **82**, 1177 (1999).
- ¹⁴C. Benedetti, C. B. Schroeder, E. Esarey, and W. P. Leemans, *Phys. Plasmas* **12**, 053101 (2012).
- ¹⁵T. Mehrling, J. Grebenyuk, F. S. Tsung, K. Floettmann, and J. Osterhoff, *Phys. Rev. ST Accel. Beams* **15**, 111303 (2012).
- ¹⁶C. Benedetti, C. B. Schroeder, E. Esarey, C. G. R. Geddes, and W. P. Leemans, in *Proc. of 2010 Advanced Accelerator Concepts Workshop*, Vol. 1299, edited by G. Nusinovich and S. Gold (AIP, NY, 2010) pp. 250–255; C. Benedetti, E. Esarey, W. P. Leemans, and C. B. Schroeder, in *Proc. of ICAP2012* (2012) p. THAA12.
- ¹⁷B. W. Montague and W. Schnell, in *Laser Acceleration of Particles*, Vol. 130, edited by C. Joshi and T. Katsouleas (AIP, 1985) p. 146.
- ¹⁸N. Kirby, M. Berry, I. Blumenfeld, M. J. Hogan, R. Ischebeck, and R. Siemann, in *Proceedings of PAC07* (JACoW, www.jacow.org, 2007) pp. 3097–3099.
- ¹⁹D. R. Nicholson, *Introduction to Plasma Theory* (Krieger, Malabar, FL, 1992).
- ²⁰J. D. Jackson, *Classical Electrodynamics*, 2nd ed. (Wiley, New York, 1975).
- ²¹V. Lebedev and S. Nagaitsev, (2013), (private communication).
- ²²G. Shvets, J. S. Wurtele, T. C. Chiou, and T. C. Katsouleas, *IEEE Trans. Plasma Sci.* **24**, 351 (1996); G. Shvets and X. Li, *Phys. Plasmas* **6**, 591 (1999).